


**PRODUCT SPECIFICATION  
FOR  
SCA60C: N1000060**

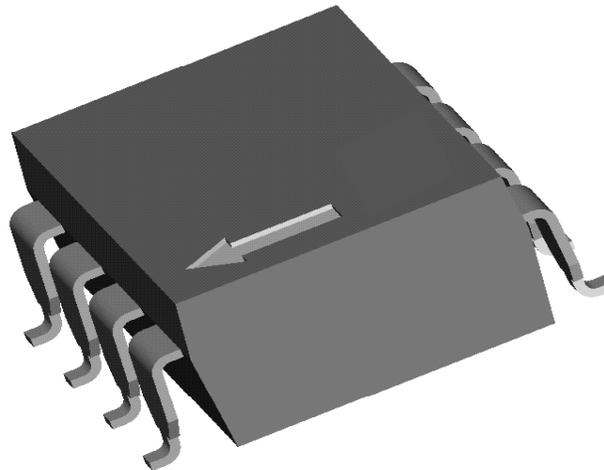

Function	Signature	Date
Originator	ML	5 Aug 2003
Engineering		
Quality		
Marketing		
Production		

**Document Change Control**

<b>Version</b>	<b>Date</b>	<b>Change description</b>	<b>ECN #</b>	<b>Author</b>
Prelim	Nov. 9, 2001	Preliminary Release		JoH
	Feb 6, 2002	Specification table updated - items removed - items re-specified - product number SCA60C: N1000060		HAM
	March 14, 02	Document number, Official release	2387	HS
	May 7, 2002	Min. Temp. -25°C, Max. temp. +75°C	2424	HS
	March 14, 03	Max. Temp. -40°C, Max. temp. +85°C	2631	ML
	Aug 05, 03	Update VTI logo ; Typing error fixed		ML


## Table of Contents

1	General description .....	4
1.1	Block diagram.....	4
1.2	SCA60C: N1000060 Accelerometer Features .....	4
2	Electrical specifications .....	5
2.1	Electrical Connection.....	5
2.2	Absolute maximum ratings .....	5
2.3	Electrical Specification, N1000060: .....	6
3	Mechanical specification (Reference only) .....	8
3.1	Dimensions (Reference only) .....	8
4	Mounting.....	9

## 1 General description

The SCA60C: N1000060 accelerometer consists of a silicon bulk micro machined sensing element chip and a signal conditioning ASIC. The chips are mounted on a lead-frame and wire bonded to appropriate contacts. The encapsulation process is a standard semiconductor transfer molding process. The sensor has 8 SMD legs (Gull-wing type).

### 1.1 Block diagram

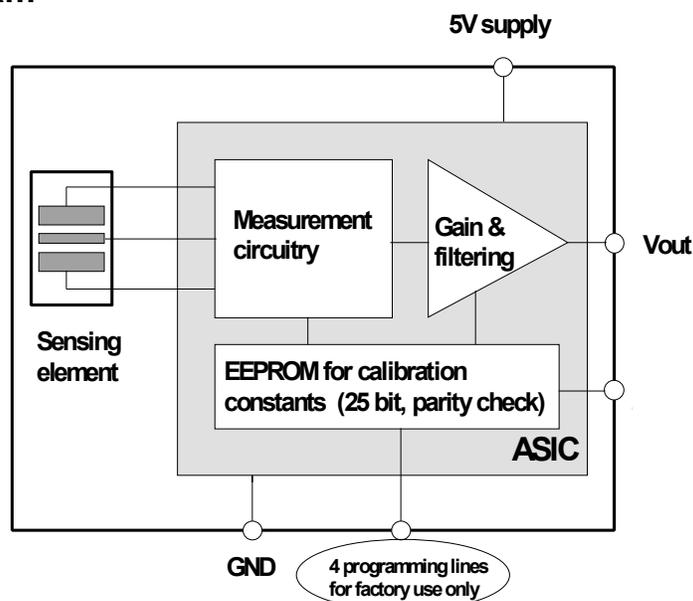

**Figure 1.** Block diagram of the N1000060

### 1.2 SCA60C: N1000060 Accelerometer Features


- Single +5V supply
- Low current consumption (2mA typ.)
- Ratiometric output in relation to supply voltage ( $V_{dd} = 4.75 \dots 5.25V$ )
- Enhanced failure detection features
  - Memory parity check during power up, and self-test cycle.
  - Built in connection failure detection.
- Wide load drive capability ( $\geq 20 \text{ k}\Omega$ ,  $\leq 20 \text{ nF}$ )
- True DC response.

## 2 Electrical specifications

### 2.1 Electrical Connection

The following is minimum requirement for electrical interface to the N1000060. If over-voltage or reverse polarity protection is needed, please contact VTI Technologies Oy for application information.

Pins 1, 2, 3 and 5 are connected together.

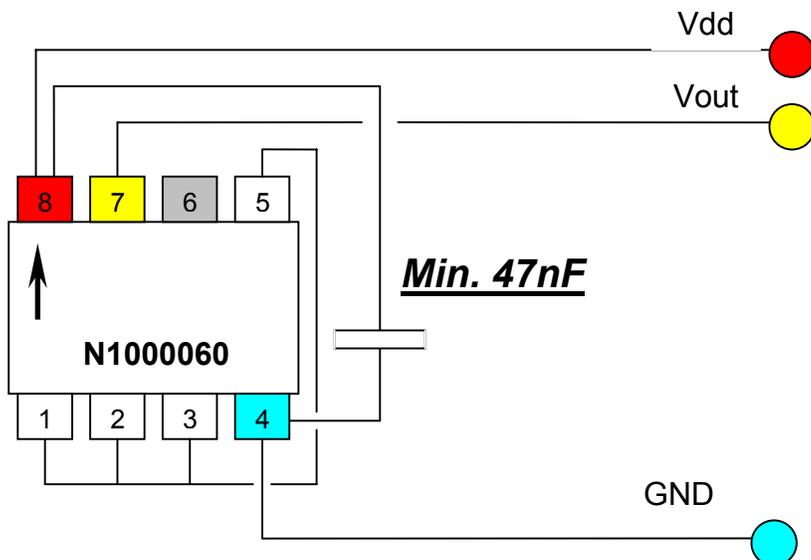

Pin #	Pin Name	Function
1	CLK	Data shift clock (Factory only)
2	C1	(Factory only)
3	MODE	Mode control input (Factory only)
4	GND	Negative supply voltage ( $V_{SS}$ )
5	PGM	Programming voltage (Factory only)
6	ST	(Factory only)
7	VOOUT	Sensor output voltage
8	VDD	Positive supply voltage ( $V_{DD}$ )

### 2.2 Absolute maximum ratings

Supply voltage ( $V_{DD}$ )	-0.3 V to +7.0V
Voltage at input / output pins	-0.3V to ( $V_{DD} + 0.3V$ )
Voltage at PGM and MODE pin	-0.3V to + 0.3V
Storage temperature	-55°C to +125°C
Operating temperature	-40°C to +125°C
Mechanical shock	Drop from 2 meters on a concrete surface. Powered or non-powered. Must be in the final product or in the shipping package.


## 2.3 Electrical Specification, N1000060:

Vdd = 5.00V and ambient temperature unless otherwise specified.


Parameter	Condition	Min.	Typ	Max.	Units
Measuring range <sup>(1)</sup>	Nominal	-1.0		+1.0	g <sup>(2)</sup>
Supply voltage Vdd		4.5	5.0	5.5	V
Current consumption	Vdd = 5 V; No load		2.0	4.0	mA
Operating temperature	Performance specified at temperatures	- 40		+ 85	°C
Resistive output load	Vout to Vdd or Vss	20			kohm
Capacitive load	Vout to Vdd or Vss			20	nF
Min. output voltage; Vdd = 5V	20k from Vout to Vdd	0		0.25	V
Max. output voltage; Vdd = 5V	20k from Vout to Vss	4.75		5.00	V
Offset (Output at 0g) <sup>(3, 12)</sup>	@ room temperature		0.5 x Vdd		V
	@ Vdd = 5V		2.5		V
Sensitivity <sup>(4, 12)</sup>	@ room temperature		0.4 x Vdd		V/g
	@ Vdd = 5V		2		V/g
Offset Error (Output at 0g) <sup>(5, 12)</sup>	- 40 ... + 85°C	-200	0	+200	mg
Sensitivity error <sup>(6, 12)</sup>	- 40 ... + 85°C	-5	0	+5	%
Typical non-linearity <sup>(7)</sup>	Range = -1g...+1g	-20		+20	mg
Frequency response -3dB <sup>(8)</sup>		20		80	Hz
Ratiometric error <sup>(9)</sup>	Vdd = 4.75...5.25V	-2		2	%
Cross-axis sensitivity <sup>(10)</sup>	@ room temperature			5	%
Output noise	Density at 20 Hz <sup>(11)</sup>		20		ug/sqrt(Hz)
Start-up delay	Reset and parity check			10	ms

- Note 1. The measuring range is limited only by the sensitivity, offset and supply voltage rails of the device
- Note 2.  $1g=9.82m/S^2$
- Note 3. Offset specified as  $V_{offset} = V_{out}(0g)$  [ V ]. See note 12
- Note 4. Sensitivity specified as  $V_{sens} = \{V_{out}(+1g) - V_{out}(-1g)\}/2$  [ V/g ]. See note 12
- Note 5. Offset error specified as  $Offset\ Error = \{V_{out}(0g)-V_{dd}/2\} / V_{sens}$  [ g ]  
 $V_{sens}$  = Nominal sensitivity  
 $V_{dd}/2$ = Nominal offset  
 See note 12
- Note 6. Sensitivity error specified as  $Sensitivity\ Error = \{ [V_{out}(+1g)-V_{out}(-1g)] / 2 - V_{sens} \} / V_{sens} \times 100\%$  [% ]  
 $V_{sens}$  = Nominal sensitivity  
 See note 12
- Note 7. From straight line through -1g and +1g
- Note 8. The frequency response is determined by the sensing element's internal gas damping. The output has true DC (0Hz) response.
- Note 9. The ratiometric error is specified as
- $$RE = 100\% \times \left( 1 - \frac{V_{out}(@V_x) \times \frac{5.00V}{V_x}}{V_{out}(@5V)} \right)$$
- Note 10. The cross-axis sensitivity determines how much acceleration, perpendicular to the measuring axis, couples to the output. The total cross-axis sensitivity is the geometric sum of the sensitivities of the two axes, which are perpendicular to the measuring axis.
- Note 11. In addition, supply voltage noise couples to the output due to the ratiometric nature of the accelerometer.  
 DC..4kHz < 5mVrms
- Note 12. Measuring positions


**+1g position**



**0g position**




**-1g position**



### 3 Mechanical specification (Reference only)


Lead frame material: Copper per Olin C-194  
Plating: Sulfamate Nickel per QQ-N-290 followed by Palladium  
Solderability: Per MIL-STD\_202F, Method 208G

#### 3.1 Dimensions (Reference only)

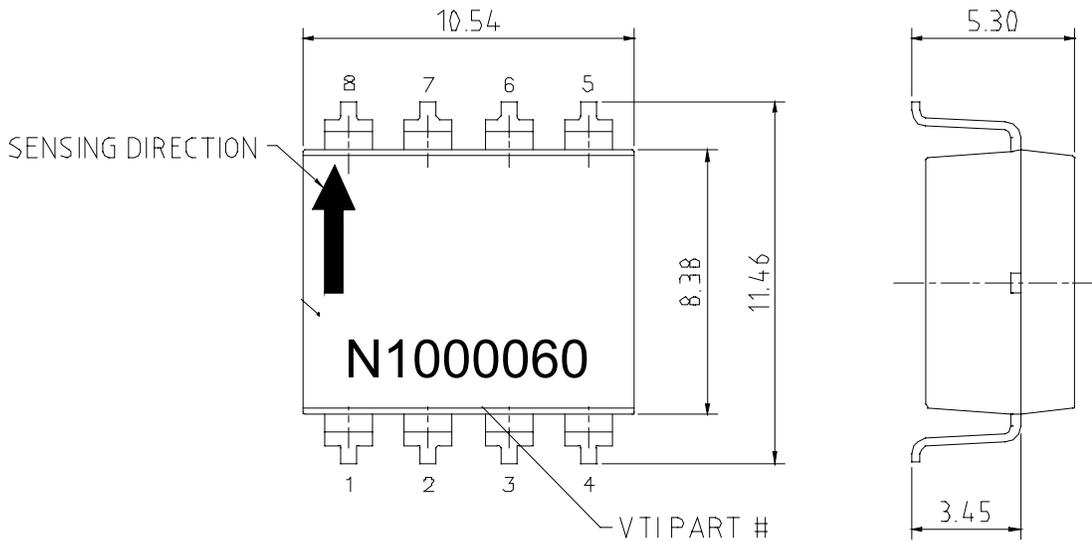


## 4 Mounting

The SCA60C:N1000060 is suitable for mounting with normal SMD pick-and-place equipment. Recommended body temperature profile during reflow soldering:

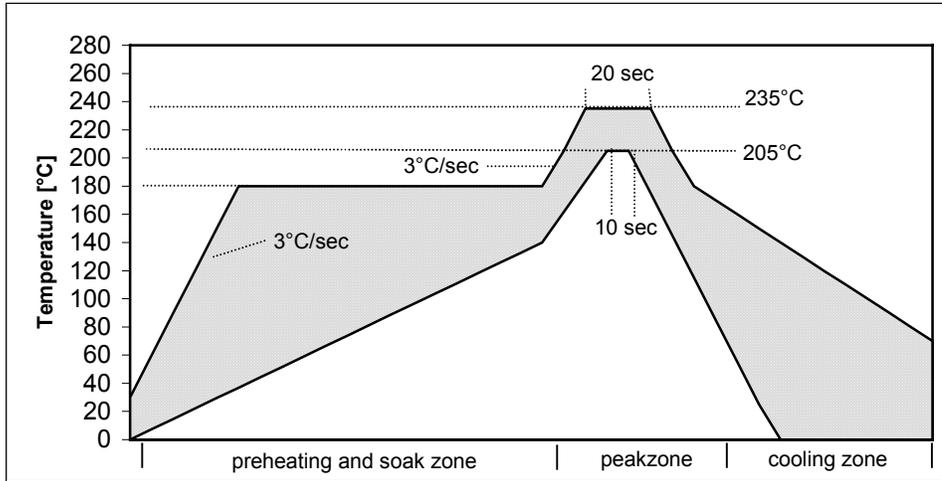

Note. Preheating time and temperatures according to solder paste manufacturer. Component body temperature during the soldering should be measured from the top of the part.

Maximum soldering temperature is 235°C/20sec.

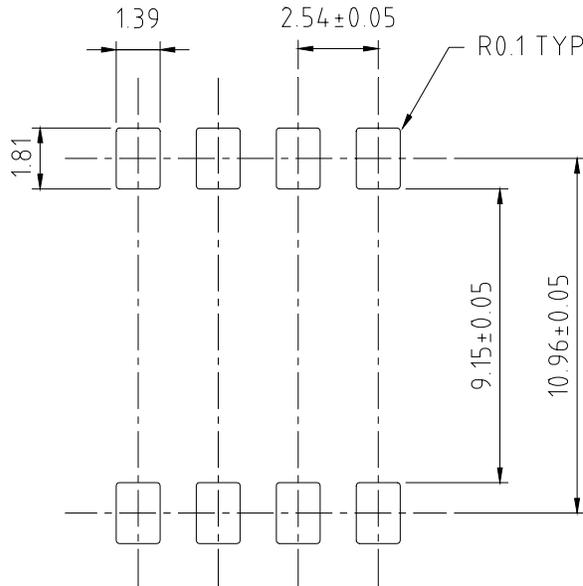

**Recommended PCB lay-out**

**Notes:**

- It is important that the part is parallel to the PCB plane and that there is no angular alignment error from intended measuring direction during assembly process.
  - 1° mounting alignment error will increase the cross-axis sensitivity by 1.7%
  - 1° mounting alignment error will change the output by 17mg
- To achieve the highest accuracy and to minimize resonances it is recommended to glue the accelerometer to the PCB before soldering
- Wave soldering is not recommended.
- A supply voltage by-pass capacitor (>47nF) is recommended
- Please note the picture below, which provides information on how the output of the accelerometer behaves in different circumstances, when assembled in a different position in earth's gravity field.

<p><b>Output voltage polarity vs. position</b></p>		
<p><b>V1 &lt; V2=2.5V @ 0g &lt; V3</b></p>		